



MAY USE 6" SIGN ON STOPPED LEG IF SPEEDS ARE 25 MPH OR LESS

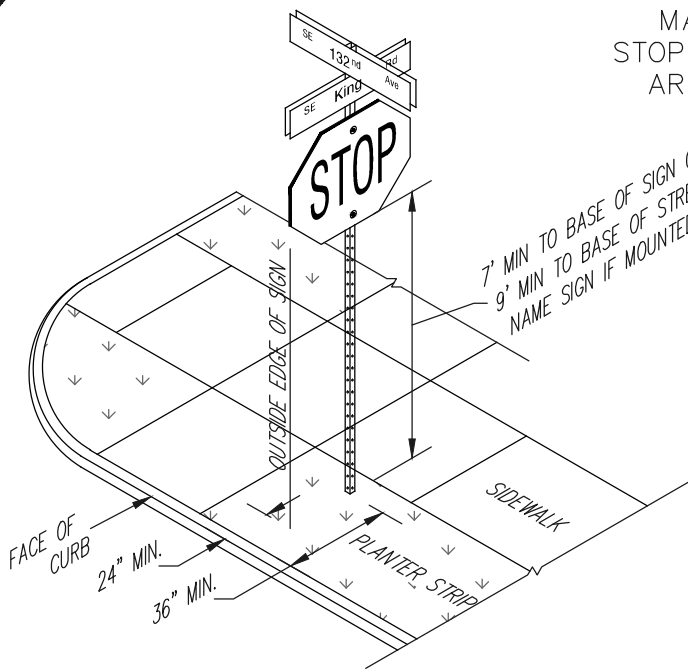

**PLANTER STRIP LOCATION**

SCALE = N.T.S. (TYP.)

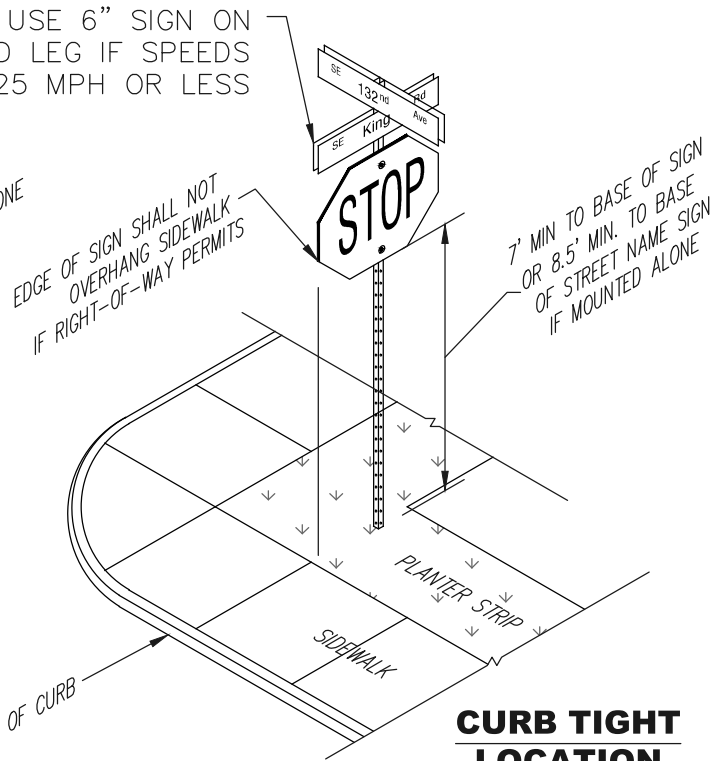

**CURB TIGHT LOCATION**

SCALE = N.T.S., TYP.

SQUARE SIGN SUPPORT ANCHOR TAPCO, V-LOC, MODEL 200-VS2 INSTALLED IN 3/4"-0" CRUSHED ROCK OUTSIDE OF CONCRETE AREA IF PLACEMENT IN CONCRETE IS NECESSARY CITY APPROVAL OF MOUNTING SYSTEM IS REQUIRED



PREDRILLING ON 1" CENTERS FOR RIVETING TO POST



**TYPICAL SIGN ATTACHMENT**

**SIGN POST ANCHOR**

5" MIN. IMBEDMENT

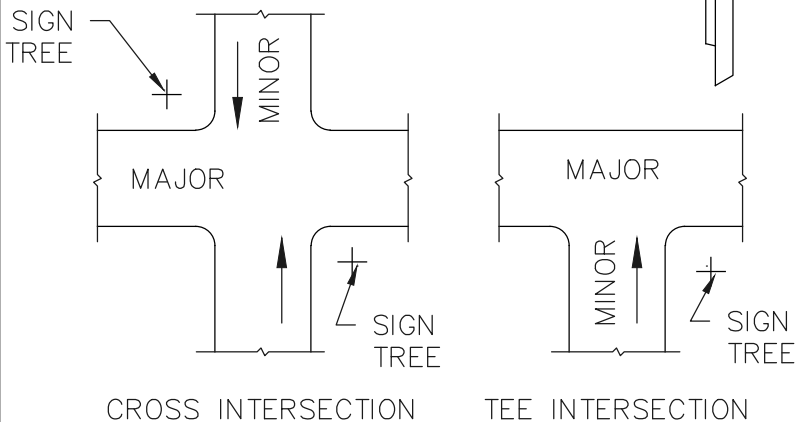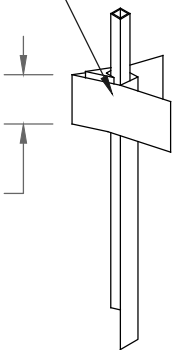

**TYPICAL STREET SIGN LOCATIONS**

**GENERAL NOTES:**

1. SIGNS SHALL BE AFFIXED TO SIGN POSTS USING ALUMINUM DRIVE RIVETS THAT LAY FLUSH WITH SIGN PANEL AFTER INSTALLATION.
2. NO PARKING SIGNS SHALL BE INSTALLED AT A 45 DEGREE ANGLE TO THE DIRECTION OF TRAFFIC.
3. A 2"x2" GA GALVANIZED "UNISTRUT TELESPAR" OR 12 GA PERFORATED POSTS OR APPROVED EQUIVALENT SHALL BE USED. SIGN COMBINATION AND MINIMUM SIGN MOUNTING HEIGHT SHALL DETERMINE POST LENGTH.
4. SEE ADDITIONAL SIGNAGE NOTES AND REQUIREMENTS ON DWG NO. 305.



**CITY OF HAPPY VALLEY  
ENGINEERING DIVISION**  
16000 SE MISTY DRIVE  
HAPPY VALLEY, OR 97086

**DWG NO: 300**

CITY ENGINEER  
CAROL EARLE, P.E.

**STREET SIGNING**

DATE: 4/1/2019

REVISED BY: PCB/JHH